
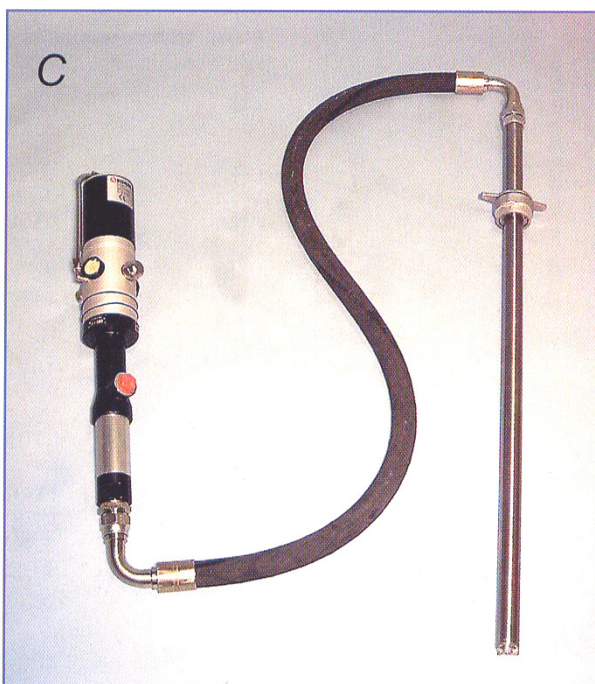


# 1 : 6 Ratio Oil Pump

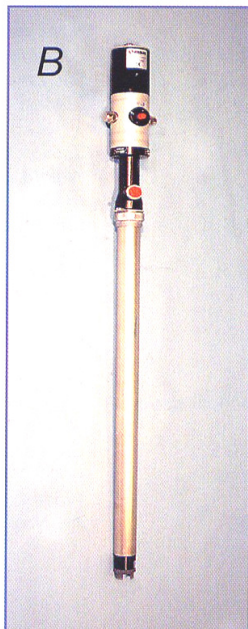

## A Air operated oil pump, ratio 1:6, basic execution

Capacity: 23 l/min  
 Valid with oil SAE30 and 0.5 MPa air pressure  
 Air pressure, min-max: 0.3-1.0 MPa (3-10 bar)  
 Air consumption: See page 47  
 Supply pressure at 0.8MPa: 4.8 MPa (48 bar)  
 Oil outlet: ISO-G3/4 female  
 Air connection: ISO-G1/4 female  
 Weight: 4 kg  
 Materials: Anodized aluminium, steel, stainless steel, brass, PVC  
 Sealings: Nitril rubber  
**Art.No: 0102137**

## B Air operated oil pump, ratio 1:6, for mounting in drum lid

With pump tube of steel and 2" drum bung fitting.  
 Pump tube: Dia. 50 mm L=960 mm  
 Total length: 1440 mm  
 Weight: 9.8 kg  
 All other data: See pump 0102137  
**Art.No: 0102100**

## C Air operated oil pump, ratio 1:6, for wall mounting

With wall bracket, hose and suction tube kit  
 Suction hose: L=1.6 m  
 Suction tube of steel with check valve: Dia. 32 mm L=940 mm  
 Weight: 5.2 kilos  
 All other data: See pump 0102100  
**Art.No: 0102099**



## R J Mellor & Co Ltd

1 Devonshire Grove, Sheffield, South Yorkshire, England, S17 3PG  
 Tele: +44 (0) 114 236 8666 Fax: +44(0) 114 236 3020  
 E-mail: sales@rjmellor.co.uk Web: www.rjmellor.co.uk

Specialist Lubrication  
 Engineers

The information contained in this data sheet is for guidance only and does not form part of any contract. The accuracy cannot be guaranteed as R J Mellor & Co Ltd. has an ongoing process of development and reserve the right to change the specification of their products without notice