

# DUAL-LINE GREASE VALVES



No. Outlets	Part Number.
1/2	5010001
2/4	5010002
3/6	5010003
4/8	5010004

## DP 6 SERIES

Material of Construction: Carbon and Stainless Steel  
 Inlet Working Pressure: min. 30 bar max. 400bar  
 Min. oil viscosity: 15 centistokes @ 40°C  
 Maxi. Apparent Grease viscosity: NLGI 3 (220 ASTM)  
 Working Temperature: - 30 to + 80°C  
 Adjustable output: 0.25 to 1.50 ccm per Stroke  
 Inlet Connections: 1/4" bsp  
 Outlet Connections: 1/4" bsp



No. Outlets	Part Number
1/2	5010010
2/4	5010011
3/6	5010012
4/8	5010013

## DG 6 SERIES

Material of Construction: Carbon and Stainless Steel  
 Inlet Working Pressure: min. 30 bar max. 400bar  
 Min. oil viscosity: 15 centistokes @ 40°C  
 Max. Apparent Grease viscosity: NLGI 3 (220 ASTM)  
 Working Temperature: - 30 to + 80°C  
 Adjustable output: 0.25 to 3.00 ccm per Stroke  
 Inlet Connections: 3/8" bsp  
 Outlet Connections: 1/4" bsp




No. Outlets	Part Number
1/2	5010019
2/4	5010020
3/6	5010021
4/8	5010022

## DGG 6 SERIES

Material of Construction: Carbon and Stainless Steel  
 Inlet Working Pressure: min. 30 bar max. 400bar  
 Min. oil viscosity: 15 centistokes @ 40°C  
 Max. Apparent Grease viscosity: NLGI 3 (220 ASTM)  
 Working Temperature: - 30 to + 80°C  
 Adjustable output: 1.50 to 12.00 ccm per Stroke  
 Inlet Connections: 3/8" bsp  
 Outlet Connections: 1/4" bsp

## MODULAR

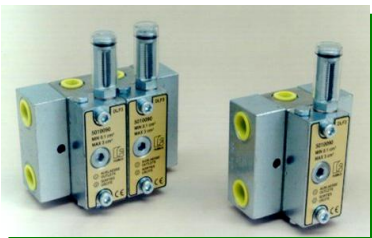


No. Outlets	Part Number
1/2	DLF - 1
2/4	DLF - 2
3/6	DLF - 3
4/8	DLF - 4


## DLF SERIES

Material of Construction: Carbon and Stainless Steel  
 Inlet Working Pressure: min. 30 bar max. 400bar  
 Min. oil viscosity: 15 centistokes @ 40°C  
 Max. Apparent Grease viscosity: NLGI 3 (220 ASTM)  
 Working Temperature: - 30 to + 80°C  
 Adjustable output: 0.25 to 3.00 ccm per Stroke  
 Inlet Connections: 3/8" bsp  
 Outlet Connections: 1/4" bsp

# DUAL LINE FEEDER BLOCK CONTROL SWITCHES

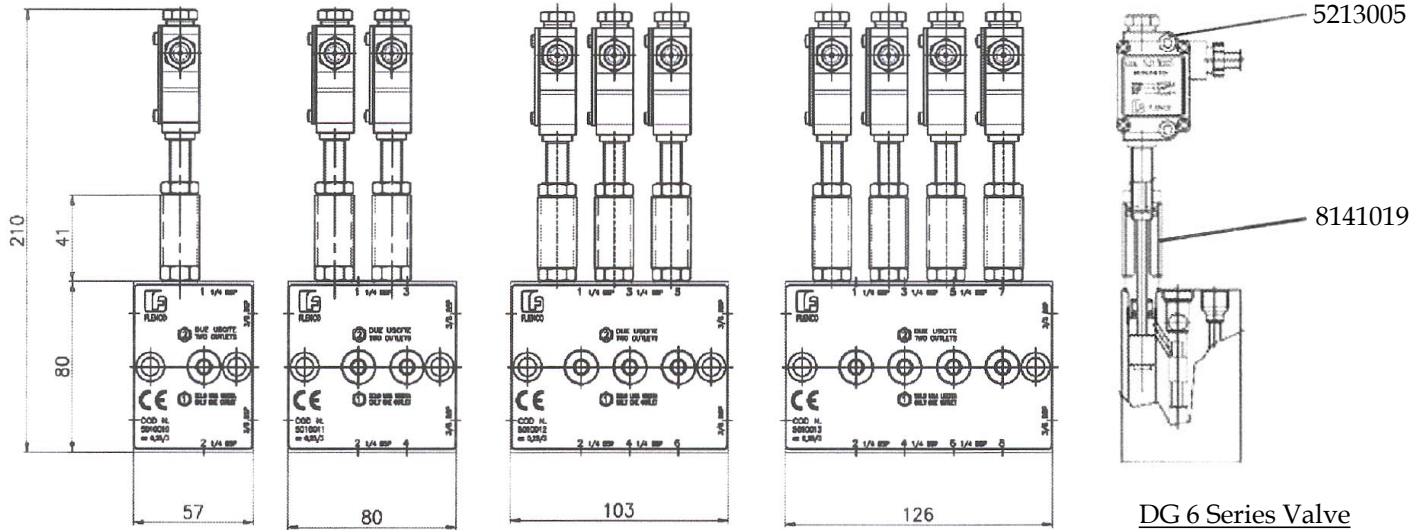

## FEEDER CONTROL MICRO SWITCHES

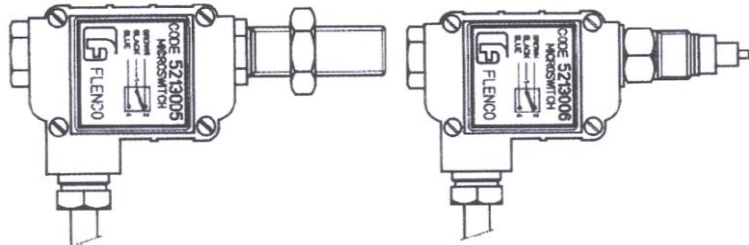

FEEDER TYPE	TURRET SIDE MICRO SWITCH	BASE SIDE MICRO SWITCH
DP 6:- adjustable output 0.25 to 1.5 ccm	5213005	5213007
DG 6 :- adjustable output 0.5 to 3 ccm		5213006
DFL :- adjustable output 0.1 to 3 ccm		5213010

### TECHNICAL CHARACTERISTICS

Electrical Feed	Up to 10 A 2500V ac at 5A 24 volt DC
Protection degree	IP 55
Working temperature	- 15 to plus 80°C
Working pressure	20MPa (2,900 psi)



**R J Mellor & Co Ltd**

1 Devonshire Grove, Sheffield, South Yorkshire, England. S17 3PG.

Tel: +44 (0) 114 236 8666 Fax: +44 (0) 114 236 3020

e-mail: sales@rjmellor.co.uk Web: www.rjmellor.co.uk

Specialist Lubrication  
Engineers