

Dual-Line Grease Valves



No. Outlets	Part Number.
1/2	5010001
2/4	5010002
3/6	5010003
4/8	5010004

DP 6 series

Material of Construction: Carbon and Stainless Steel
 Inlet Working Pressure: min. 30 bar max. 400bar
 Min. oil viscosity: 15 centistokes @ 40°C
 Maxi. Apparent Grease viscosity: NLGI 3 (220 ASTM)
 Working Temperature: - 30 to + 80°C
 Adjustable output: 0.25 to 1.50 ccm per Stroke
 Inlet Connections: 1/4" bsp
 Outlet Connections: 1/4" bsp



No. Outlets	Part Number
1/2	5010010
2/4	5010011
3/6	5010012
4/8	5010013

DG 6 series

Material of Construction: Carbon and Stainless Steel
 Inlet Working Pressure: min. 30 bar max. 400bar
 Min. oil viscosity: 15 centistokes @ 40°C
 Max. Apparent Grease viscosity: NLGI 3 (220 ASTM)
 Working Temperature: - 30 to + 80°C
 Adjustable output: 0.25 to 3.00 ccm per Stroke
 Inlet Connections: 3/8" bsp
 Outlet Connections: 1/4" bsp




No. Outlets	Part Number
1/2	5010019
2/4	5010020
3/6	5010021
4/8	5010022

DGG 6 series

Material of Construction: Carbon and Stainless Steel
 Inlet Working Pressure: min. 30 bar max. 400bar
 Min. oil viscosity: 15 centistokes @ 40°C
 Max. Apparent Grease viscosity: NLGI 3 (220 ASTM)
 Working Temperature: - 30 to + 80°C
 Adjustable output: 1.50 to 12.00 ccm per Stroke
 Inlet Connections: 3/8" bsp
 Outlet Connections: 1/4" bsp

MODULAR

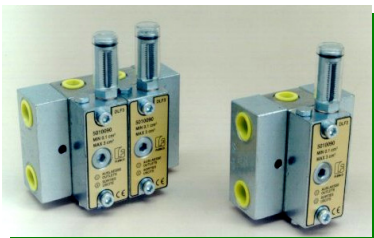

No. Outlets	Part Number
1/2	DLF - 1
2/4	DLF - 2
3/6	DLF - 3
4/8	DLF - 4

DLF Series

Material of Construction: Carbon and Stainless Steel
 Inlet Working Pressure: min. 30 bar max. 400bar
 Min. oil viscosity: 15 centistokes @ 40°C
 Max. Apparent Grease viscosity: NLGI 3 (220 ASTM)
 Working Temperature: - 30 to + 80°C
 Adjustable output: 0.25 to 3.00 ccm per Stroke
 Inlet Connections: 3/8" bsp
 Outlet Connections: 1/4" bsp